

# Product information

## Digital test indicator MarTest 800 EW

### Product features

- Inductive measuring system
- Battery life approx. 2 years
- Operating unit is protected against coolants and lubricants, protection class IP65
- Combined analog and digital display
- Operating and display unit (bezel) can be rotated through 280°
- Satin chrome finished housing with 3 dovetail guideways
- Shockproof
- Movement bearings are jeweled
- Automatic matching to sensing direction
- Anti-magnetic
- Double lever supported in ball bearings
- Overload protection provided by slip clutch

### Functions

ON/OFF, RESET (set display to zero), mm/inch, MAX/MIN memory for searching the reversal point, (MAX-MIN) for testing flatness and concentricity

### Package contains

spanner for changing the styli, stylus dia.  $\varnothing$  2 mm, mounting shaft 800a8, test certificate, instruction manual, battery, case

### Application

- Measurement of concentricity, alignment, parallelism and flatness
- Centering of bores and shafts
- Parallel or perpendicular alignment of work pieces

### Data interface

Opto RS-232C, USB




Item no.: **4305120**

### Technical data

|                                                          |                      |
|----------------------------------------------------------|----------------------|
| <b>Measuring range mm</b>                                | $\pm 0.4$            |
| <b>Measuring range inches</b>                            | $\pm .015''$         |
| <b>Display ranges</b>                                    | 0.4 - 0 - 0.4 (mm)   |
| <b>Resolution mm/inches</b>                              | 0.001 / .00005"      |
| <b>Span of error fe (<math>\mu</math>m)</b>              | 10 $\mu$ m           |
| <b>Total span of error fges (<math>\mu</math>m)</b>      | 13 $\mu$ m           |
| <b>Partial measuring range ft (<math>\mu</math>m)</b>    | 5 $\mu$ m            |
| <b>Measuring value hysteresis fu (<math>\mu</math>m)</b> | 5 $\mu$ m            |
| <b>Repeatability fw (<math>\mu</math>m)</b>              | 3 $\mu$ m            |
| <b>Measuring force</b>                                   | 0.13 N               |
| <b>Battery type</b>                                      | CR 2032 (3V Lithium) |

### Dimensions

|                           |         |
|---------------------------|---------|
| <b>Dimensions e in mm</b> | 75 mm   |
| <b>Dimensions f in mm</b> | 99 mm   |
| <b>Dimensions c in mm</b> | 13.6 mm |
| <b>Dimensions d in mm</b> | 17.8 mm |



### Accessories

| Order no. | Designation                  | Product type |
|-----------|------------------------------|--------------|
| 4305122   | Data connection cable RS232C | 800 EWr      |
| 4305121   | Data connection cable USB    | 800 EWu      |

# Product information

## Digital test indicator MarTest 800 EWR

### Product features

- Inductive measuring system
- Battery life approx. 2 years
- Operating unit is protected against coolants and lubricants, protection class IP65
- Combined analog and digital display
- Operating and display unit (bezel) can be rotated through 280°
- Satin chrome finished housing with 3 dovetail guideways
- Shockproof
- Movement bearings are jeweled
- Automatic matching to sensing direction
- Anti-magnetic
- Double lever supported in ball bearings
- Overload protection provided by slip clutch

### Functions

ON/OFF, RESET (set display to zero), mm/inch, MAX/MIN memory for searching the reversal point, (MAX-MIN) for testing flatness and concentricity

### Package contains

spanner for changing the styli, stylus dia.  $\varnothing$  2 mm, mounting shaft 800a8, test certificate, instruction manual, battery, case

### Application

- Measurement of concentricity, alignment, parallelism and flatness
- Centering of bores and shafts
- Parallel or perpendicular alignment of work pieces

### Data interface

Opto RS-232C, USB




Item no.: **4306140**

### Technical data

|                                                                 |                      |
|-----------------------------------------------------------------|----------------------|
| <b>Measuring range mm</b>                                       | $\pm 2.2$            |
| <b>Measuring range inches</b>                                   | $\pm .0433''$        |
| <b>Display ranges</b>                                           | -2.2 - 0 - +2.2 (mm) |
| <b>Resolution mm/inches</b>                                     | 0.001 / .00005"      |
| <b>Span of error fe (<math>\mu\text{m}</math>)</b>              | 10 $\mu\text{m}$     |
| <b>Total span of error fges (<math>\mu\text{m}</math>)</b>      | 12 $\mu\text{m}$     |
| <b>Partial measuring range ft (<math>\mu\text{m}</math>)</b>    | 3 $\mu\text{m}$      |
| <b>Measuring value hysteresis fu (<math>\mu\text{m}</math>)</b> | 5 $\mu\text{m}$      |
| <b>Repeatability fw (<math>\mu\text{m}</math>)</b>              | 2 $\mu\text{m}$      |
| <b>Measuring force</b>                                          | 0.06 N               |
| <b>Battery type</b>                                             | CR 2032 (3V Lithium) |

### Dimensions

|                           |          |
|---------------------------|----------|
| <b>Dimensions e in mm</b> | 98.8 mm  |
| <b>Dimensions f in mm</b> | 106.5 mm |
| <b>Dimensions c in mm</b> | 41 mm    |
| <b>Dimensions d in mm</b> | 44.5 mm  |

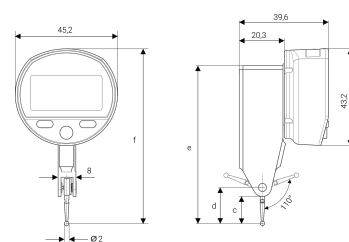

### Accessories

| Order no. | Designation                  | Product type |
|-----------|------------------------------|--------------|
| 4305122   | Data connection cable RS232C | 800 EWr      |
| 4305121   | Data connection cable USB    | 800 EWu      |

# Product information

## Digital test indicator MarTest 800 EWR

### Product features

- Inductive measuring system
- Battery life approx. 2 years
- Operating unit is protected against coolants and lubricants, protection class IP65
- Combined analog and digital display
- Operating and display unit (bezel) can be rotated through 280°
- Satin chrome finished housing with 3 dovetail guideways
- Shockproof
- Movement bearings are jeweled
- Automatic matching to sensing direction
- Anti-magnetic
- Double lever supported in ball bearings
- Overload protection provided by slip clutch

### Functions

ON/OFF, RESET (set display to zero), mm/inch, MAX/MIN memory for searching the reversal point, (MAX-MIN) for testing flatness and concentricity

### Package contains

spanner for changing the styli, stylus dia.  $\varnothing$  2 mm, mounting shaft 800a8, test certificate, instruction manual, battery, case

### Application

- Measurement of concentricity, alignment, parallelism and flatness
- Centering of bores and shafts
- Parallel or perpendicular alignment of work pieces

### Data interface

Opto RS-232C, USB




Item no.: **4306130**

### Technical data

|                                                                 |                      |
|-----------------------------------------------------------------|----------------------|
| <b>Measuring range mm</b>                                       | $\pm 0.9$            |
| <b>Measuring range inches</b>                                   | $\pm .0354''$        |
| <b>Display ranges</b>                                           | -0.9 - 0 - +0.9 (mm) |
| <b>Resolution mm/inches</b>                                     | 0.001 / .00005"      |
| <b>Span of error fe (<math>\mu\text{m}</math>)</b>              | 5 $\mu\text{m}$      |
| <b>Total span of error fges (<math>\mu\text{m}</math>)</b>      | 6 $\mu\text{m}$      |
| <b>Partial measuring range ft (<math>\mu\text{m}</math>)</b>    | 2 $\mu\text{m}$      |
| <b>Measuring value hysteresis fu (<math>\mu\text{m}</math>)</b> | 3 $\mu\text{m}$      |
| <b>Repeatability fw (<math>\mu\text{m}</math>)</b>              | 2 $\mu\text{m}$      |
| <b>Measuring force</b>                                          | 0.15 N               |
| <b>Battery type</b>                                             | CR 2032 (3V Lithium) |

### Dimensions

|                           |         |
|---------------------------|---------|
| <b>Dimensions e in mm</b> | 72 mm   |
| <b>Dimensions f in mm</b> | 79.7 mm |
| <b>Dimensions c in mm</b> | 14.2 mm |
| <b>Dimensions d in mm</b> | 17.7 mm |

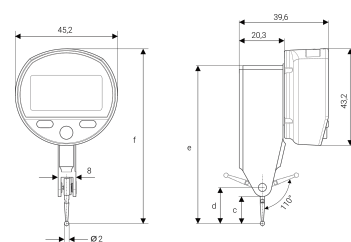

### Accessories

| Order no. | Designation                  | Product type |
|-----------|------------------------------|--------------|
| 4305122   | Data connection cable RS232C | 800 EWr      |
| 4305121   | Data connection cable USB    | 800 EWu      |

# Product information

## Digital test indicator MarTest 800 EWL

### Product features

- Inductive measuring system
- Battery life approx. 2 years
- Operating unit is protected against coolants and lubricants, protection class IP65
- Combined analog and digital display
- Operating and display unit (bezel) can be rotated through 280°
- Satin chrome finished housing with 3 dovetail guideways
- Shockproof
- Movement bearings are jeweled
- Automatic matching to sensing direction
- Anti-magnetic
- Double lever supported in ball bearings
- Overload protection provided by slip clutch

### Functions

ON/OFF, RESET (set display to zero), mm/inch, MAX/MIN memory for searching the reversal point, (MAX-MIN) for testing flatness and concentricity

### Package contains

spanner for changing the styli, stylus dia.  $\varnothing$  2 mm, mounting shaft 800a8, test certificate, instruction manual, battery, case

### Application

- Measurement of concentricity, alignment, parallelism and flatness
- Centering of bores and shafts
- Parallel or perpendicular alignment of work pieces

### Data interface

Opto RS-232C, USB




Item no.: **4306120**

### Technical data

|                                                                 |                      |
|-----------------------------------------------------------------|----------------------|
| <b>Measuring range mm</b>                                       | $\pm 0.25$           |
| <b>Measuring range inches</b>                                   | $\pm .010''$         |
| <b>Display ranges</b>                                           | 0.25 - 0 - 0.25 (mm) |
| <b>Resolution mm/inches</b>                                     | 0.001 / .00005"      |
| <b>Span of error fe (<math>\mu\text{m}</math>)</b>              | 10 $\mu\text{m}$     |
| <b>Total span of error fges (<math>\mu\text{m}</math>)</b>      | 13 $\mu\text{m}$     |
| <b>Partial measuring range ft (<math>\mu\text{m}</math>)</b>    | 5 $\mu\text{m}$      |
| <b>Measuring value hysteresis fu (<math>\mu\text{m}</math>)</b> | 7 $\mu\text{m}$      |
| <b>Repeatability fw (<math>\mu\text{m}</math>)</b>              | 3 $\mu\text{m}$      |
| <b>Measuring force</b>                                          | 0.07 N               |
| <b>Battery type</b>                                             | CR 2032 (3V Lithium) |

### Dimensions

|                           |         |
|---------------------------|---------|
| <b>Dimensions e in mm</b> | 102 mm  |
| <b>Dimensions f in mm</b> | 126 mm  |
| <b>Dimensions c in mm</b> | 40.3 mm |
| <b>Dimensions d in mm</b> | 44.6 mm |



### Accessories

| Order no. | Designation                  | Product type |
|-----------|------------------------------|--------------|
| 4305122   | Data connection cable RS232C | 800 EWr      |
| 4305121   | Data connection cable USB    | 800 EWu      |

**MarTest** | Test indicator

---

## MarTest 800 H

Art. no. 4303200

Test indicator MarTest 800 H

DIN 2270

Measuring range mm:  $\pm 0.4$  mm

Graduation value mm: 0.01

Package contains: spanner for changing the styli, stylus dia.  
 $\varnothing$  2 mm, mounting shaft 800a8, test certificate, instruction  
manual, case



**MarTest** | Test indicator

---

# MarTest 800 SGB

Art. no. 4301300

Test indicator MarTest 800 SGB

Factory standard

Measuring range mm:  $\pm 0.5$  mm

Graduation value mm: 0.01

Package contains: spanner for changing the styli, stylus dia.  $\varnothing 2$  mm, mounting shaft 800a6 (800 SA/SGA/SGB), mounting shaft 800a8, test certificate, instruction manual, case



**MarTest** | Test indicator

---

## MarTest 800 SGL

Art. no. 4306250

Test indicator MarTest 800 SGL

Factory standard

Measuring range mm:  $\pm 0.25$  mm

Graduation value mm: 0.01

Package contains: spanner for changing the styli, stylus dia.

$\varnothing 2$  mm, mounting shaft 800a8, test certificate, instruction

manual, case



**MarTest** | Test indicator

---

## MarTest 800 SRM

Art. no. 4308250

Test indicator MarTest 800 SRM

Factory standard

Measuring range mm:  $\pm 0.2$  mm

Graduation value mm: 0.002

Package contains: spanner for changing the styli, stylus dia.  
 $\varnothing$  2 mm, mounting shaft 800a8, test certificate, instruction  
manual, case



**MarTest** | Test indicator

---

## MarTest 800 SM

Art. no. 4308150

Test indicator MarTest 800 SM

DIN 2270

Measuring range mm:  $\pm 0.1$  mm

Graduation value mm: 0.002

Package contains: spanner for changing the styli, stylus dia.  
 $\varnothing 2$  mm, mounting shaft 800a8, test certificate, instruction  
manual, case



**MarTest** | Test indicator

---

## MarTest 800 SGA

Art. no. 4301250

Test indicator MarTest 800 SGA

Factory standard

Measuring range mm:  $\pm 0.25$  mm

Graduation value mm: 0.01

Package contains: spanner for changing the styli, stylus dia.  
 $\varnothing$  2 mm, mounting shaft 800a6 (800 SA/SGA/SGB),  
mounting shaft 800a8, test certificate, instruction manual,  
case



**MarTest** | Test indicator

---

## MarTest 800 SR

Art. no. 4307250

Test indicator MarTest 800 SR

Factory standard

Measuring range mm:  $\pm 0.8$  mm

Graduation value mm: 0.01

Package contains: spanner for changing the styli, stylus dia.  
 $\varnothing$  2 mm, mounting shaft 800a8, test certificate, instruction  
manual, case



**MarTest** | Test indicator

---

## MarTest 800 V

Art. no. 4302200

Test indicator MarTest 800 V


DIN 2270

Measuring range mm:  $\pm 0.4$  mm

Graduation value mm: 0.01

Package contains: spanner for changing the styli, stylus dia.

$\varnothing$  2 mm, mounting shaft 800a8, test certificate, instruction manual, case

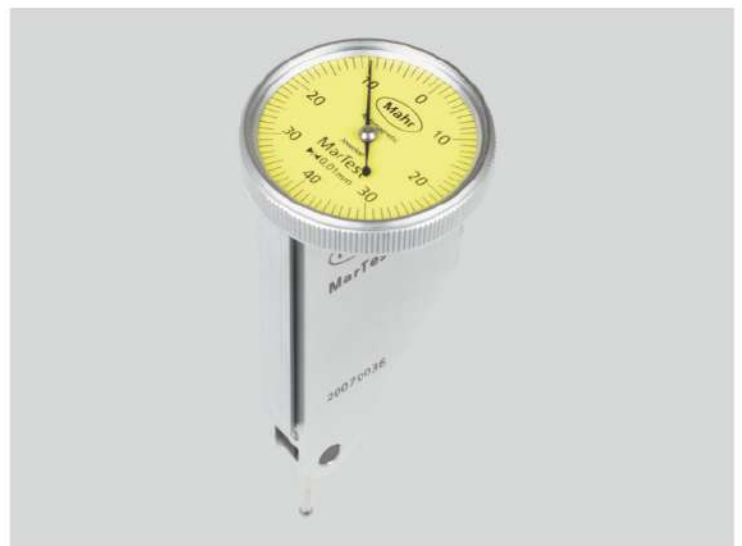

**MarTest** | Test indicator

---

## MarTest 800 S

Art. no. 4305200

Test indicator MarTest 800 S

DIN 2270

Measuring range mm:  $\pm 0.4$  mm

Graduation value mm: 0.01

Package contains: spanner for changing the styli, stylus dia.  
 $\varnothing$  2 mm, mounting shaft 800a8, test certificate, instruction  
manual, case



**MarTest** | Test indicator

---

## MarTest 800 SA

Art. no. 4301200

Test indicator MarTest 800 SA

Factory standard

Measuring range mm:  $\pm 0.25$  mm

Graduation value mm: 0.01

Package contains: spanner for changing the styli, stylus dia.  
 $\varnothing 2$  mm, mounting shaft 800a6 (800 SA/SGA/SGB),  
mounting shaft 800a8, test certificate, instruction manual,  
case



**MarTest** | Test indicator

---

## MarTest 800 SGM

Art. no. 4308200

Test indicator MarTest 800 SGM

DIN 2270

Measuring range mm:  $\pm 0.1$  mm

Graduation value mm: 0.002

Package contains: spanner for changing the styli, stylus dia.

$\varnothing 2$  mm, mounting shaft 800a8, test certificate, instruction manual, case



**MarTest** | Test indicator

---

## MarTest 800 SGE

Art. no. 4308220

Test indicator MarTest 800 SGE

Factory standard

Measuring range mm:  $\pm 0.07$  mm

Graduation value mm: 0.001

Package contains: spanner for changing the styli, stylus dia.  
 $\varnothing$  2 mm, mounting shaft 800a8, test certificate, instruction  
manual, case



**MarTest** | Test indicator

---

## MarTest 800 SL

Art. no. 4306200

Test indicator MarTest 800 SL

Factory standard

Measuring range mm:  $\pm 0.25$  mm

Graduation value mm: 0.01

Package contains: spanner for changing the styli, stylus dia.

$\varnothing 2$  mm, mounting shaft 800a8, test certificate, instruction manual, case



**MarTest** | Test indicator

---

## MarTest 800 SG

Art. no. 4307200

Test indicator MarTest 800 SG

DIN 2270

Measuring range mm:  $\pm 0.4$  mm

Graduation value mm: 0.01

Package contains: spanner for changing the styli, stylus dia.

$\varnothing 2$  mm, mounting shaft 800a8, test certificate, instruction

manual, case



**MarTest** | Test indicator

---

## MarTest 800 H

Art. no. 4303200

Test indicator MarTest 800 H

DIN 2270

Measuring range mm:  $\pm 0.4$  mm

Graduation value mm: 0.01

Package contains: spanner for changing the styli, stylus dia.

$\varnothing 2$  mm, mounting shaft 800a8, test certificate, instruction

manual, case



**MarTest** | Test indicator

---

# MarTest 800 SGB

Art. no. 4301300

Test indicator MarTest 800 SGB  
Factory standard  
Measuring range mm:  $\pm 0.5$  mm  
Graduation value mm: 0.01  
Package contains: spanner for changing the styli, stylus dia.  
 $\varnothing 2$  mm, mounting shaft 800a6 (800 SA/SGA/SGB),  
mounting shaft 800a8, test certificate, instruction manual,  
case



**MarTest** | Test indicator

---

## MarTest 800 SGL

Art. no. 4306250

Test indicator MarTest 800 SGL

Factory standard

Measuring range mm:  $\pm 0.25$  mm

Graduation value mm: 0.01

Package contains: spanner for changing the styli, stylus dia.  
 $\varnothing$  2 mm, mounting shaft 800a8, test certificate, instruction  
manual, case



**MarTest** | Test indicator

---

# MarTest 800 SRM

Art. no. 4308250

Test indicator MarTest 800 SRM

Factory standard

Measuring range mm:  $\pm 0.2$  mm

Graduation value mm: 0.002

Package contains: spanner for changing the styli, stylus dia.  
 $\varnothing 2$  mm, mounting shaft 800a8, test certificate, instruction  
manual, case



**MarTest** | Test indicator

---

## MarTest 800 SM

Art. no. 4308150

Test indicator MarTest 800 SM

DIN 2270

Measuring range mm:  $\pm 0.1$  mm

Graduation value mm: 0.002

Package contains: spanner for changing the styli, stylus dia.  
 $\varnothing 2$  mm, mounting shaft 800a8, test certificate, instruction  
manual, case



**MarTest** | Test indicator

---

# MarTest 800 SGA

Art. no. 4301250

Test indicator MarTest 800 SGA

Factory standard

Measuring range mm:  $\pm 0.25$  mm

Graduation value mm: 0.01

Package contains: spanner for changing the styli, stylus dia.  $\varnothing 2$  mm, mounting shaft 800a6 (800 SA/SGA/SGB), mounting shaft 800a8, test certificate, instruction manual, case



**MarTest** | Test indicator

---

# MarTest 800 SR

Art. no. 4307250

Test indicator MarTest 800 SR

Factory standard

Measuring range mm:  $\pm 0.8$  mm

Graduation value mm: 0.01

Package contains: spanner for changing the styli, stylus dia.  
 $\varnothing 2$  mm, mounting shaft 800a8, test certificate, instruction  
manual, case



**MarTest** | Test indicator

---

# MarTest 800 V

Art. no. 4302200

Test indicator MarTest 800 V

DIN 2270

Measuring range mm:  $\pm 0.4$  mm

Graduation value mm: 0.01

Package contains: spanner for changing the styli, stylus dia.

$\varnothing$  2 mm, mounting shaft 800a8, test certificate, instruction manual, case



**MarTest** | Test indicator

---

## MarTest 800 S

Art. no. 4305200

Test indicator MarTest 800 S

DIN 2270

Measuring range mm:  $\pm 0.4$  mm

Graduation value mm: 0.01

Package contains: spanner for changing the styli, stylus dia.  $\varnothing 2$  mm, mounting shaft 800a8, test certificate, instruction manual, case



**MarTest** | Test indicator

---

## MarTest 800 SA

Art. no. 4301200

Test indicator MarTest 800 SA

Factory standard

Measuring range mm:  $\pm 0.25$  mm

Graduation value mm: 0.01

Package contains: spanner for changing the styli, stylus dia.  
 $\varnothing 2$  mm, mounting shaft 800a6 (800 SA/SGA/SGB),  
mounting shaft 800a8, test certificate, instruction manual,  
case



**MarTest** | Test indicator

# MarTest 800 SGM

Art. no. 4308200

Test indicator MarTest 800 SGM  
DIN 2270

Measuring range mm:  $\pm 0.1$  mm

Graduation value mm: 0.002

Package contains: spanner for changing the styli, stylus dia.  
 $\varnothing 2$  mm, mounting shaft 800a8, test certificate, instruction  
manual, case



**MarTest** | Test indicator

---

## MarTest 800 SGE

Art. no. 4308220

Test indicator MarTest 800 SGE

Factory standard

Measuring range mm:  $\pm 0.07$  mm

Graduation value mm: 0.001

Package contains: spanner for changing the styli, stylus dia.  
 $\varnothing$  2 mm, mounting shaft 800a8, test certificate, instruction  
manual, case



**MarTest** | Test indicator

---

## MarTest 800 SL

Art. no. 4306200

Test indicator MarTest 800 SL

Factory standard

Measuring range mm:  $\pm 0.25$  mm

Graduation value mm: 0.01

Package contains: spanner for changing the styli, stylus dia.

$\varnothing 2$  mm, mounting shaft 800a8, test certificate, instruction manual, case



**MarTest** | Test indicator

---

## MarTest 800 SG

Art. no. 4307200

Test indicator MarTest 800 SG

DIN 2270

Measuring range mm:  $\pm 0.4$  mm

Graduation value mm: 0.01

Package contains: spanner for changing the styli, stylus dia.  
 $\varnothing$  2 mm, mounting shaft 800a8, test certificate, instruction  
manual, case



**MarTest** | Test indicator

---

## MarTest 801 S

Art. no. 4305950

Test indicator MarTest 801 S

Factory standard

Measuring range mm:  $\pm .015''$

Graduation value inches:  $.0005''$

Package contains: spanner for changing the styli, stylus dia.  
 $\varnothing 2$  mm, mounting shaft 800a3/8, test certificate, instruction  
manual, case



**MarTest** | Test indicator

---

## MarTest 801 SM

Art. no. 4308960

Test indicator MarTest 801 SM

Factory standard

Measuring range mm:  $\pm .004$ "

Graduation value inches: .0001"

Package contains: spanner for changing the styli, stylus dia.  
 $\varnothing$  2 mm, mounting shaft 800a3/8, test certificate, instruction  
manual, case



**MarTest** | Test indicator

---

## MarTest 801 SL

Art. no. 4306950

Test indicator MarTest 801 SL

Factory standard

Measuring range mm:  $\pm .010''$

Graduation value inches:  $.0005''$

Package contains: spanner for changing the styli, stylus dia.  
 $\varnothing 2$  mm, mounting shaft 800a3/8, test certificate, instruction  
manual, case



**MarTest** | Test indicator

---

## MarTest 801 S1

Art. no. 4305960

Test indicator MarTest 801 S1

Factory standard

Measuring range mm:  $\pm .015''$

Graduation value inches:  $.0005''$

Package contains: spanner for changing the styli, stylus dia.  $\varnothing 2$  mm, mounting shaft 800a3/8, test certificate, instruction manual, case



**MarTest** | Test indicator

---

## MarTest 801 SGL

Art. no. 4306960

Test indicator MarTest 801 SGL

Factory standard

Measuring range mm:  $\pm .010''$

Graduation value inches:  $.0005''$

Package contains: spanner for changing the styli, stylus dia.

$\varnothing 2$  mm, mounting shaft 800a3/8, test certificate, instruction manual, case



**MarTest** | Test indicator

---

## MarTest 801 SGM

Art. no. 4308970

Test indicator MarTest 801 SGM

Factory standard

Measuring range mm:  $\pm .004$ "

Graduation value inches:  $.0001$ "

Package contains: spanner for changing the styli, stylus dia.  
 $\varnothing 2$  mm, mounting shaft 800a3/8, test certificate, instruction  
manual, case



**MarTest** | Test indicator

---

## MarTest 801 SRM

Art. no. 4308980

Test indicator MarTest 801 SRM

Factory standard

Measuring range mm:  $\pm .008''$

Graduation value inches:  $.0001''$

Package contains: spanner for changing the styli, stylus dia.  $\varnothing 2$  mm, mounting shaft 800a3/8, test certificate, instruction manual, case



**MarTest** | Test indicator

---

## MarTest 801 SG

Art. no. 4307950

Test indicator MarTest 801 SG

Factory standard

Measuring range mm:  $\pm .015''$

Graduation value inches:  $.0005''$

Package contains: spanner for changing the styli, stylus dia.  
 $\varnothing 2$  mm, mounting shaft 800a3/8, test certificate, instruction  
manual, case



**MarTest** | Test indicator

---

## MarTest 801 SR

Art. no. 4307960

Test indicator MarTest 801 SR

Factory standard

Measuring range mm:  $\pm .030''$

Graduation value inches:  $.0005''$

Package contains: spanner for changing the styli, stylus dia.  
 $\varnothing 2$  mm, mounting shaft 800a3/8, test certificate, instruction  
manual, case



**MarTest** | Test indicator

## MarTest 801 SGE

Art. no. 4308985


Test indicator MarTest 801 SGE

Factory standard

Measuring range mm:  $\pm .004$ "

Graduation value inches:  $.00005$ "

Package contains: spanner for changing the styli, stylus dia.  $\varnothing 2$  mm, mounting shaft 800a3/8, test certificate, instruction manual, case

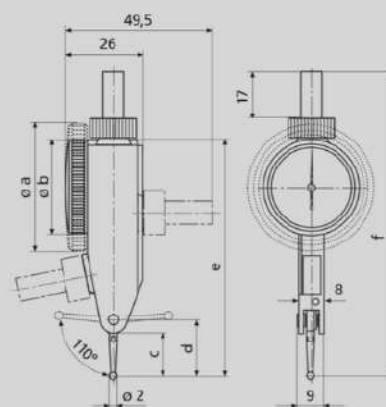

**MarTest** | Test indicator

---

## MarTest 801 SGI

Art. no. 4307970

Test indicator MarTest 801 SGI

Factory standard

Measuring range mm:  $\pm .015''$

Graduation value inches:  $.0005''$

Package contains: spanner for changing the styli, stylus dia.  $\varnothing 2$  mm, mounting shaft 800a3/8, test certificate, instruction manual, case



**MarTest** | Test indicator

---

## MarTest 801 H

Art. no. 4303950

Test indicator MarTest 801 H

Factory standard

Measuring range mm:  $\pm .015''$

Graduation value inches:  $.0005''$

Package contains: spanner for changing the styli, stylus dia.  $\varnothing 2$  mm, mounting shaft 800a3/8, test certificate, instruction manual, case

